




Hammer®

N2-35
Hammer

N2-35

High quality and yet
affordable for everyone.

Details that convince

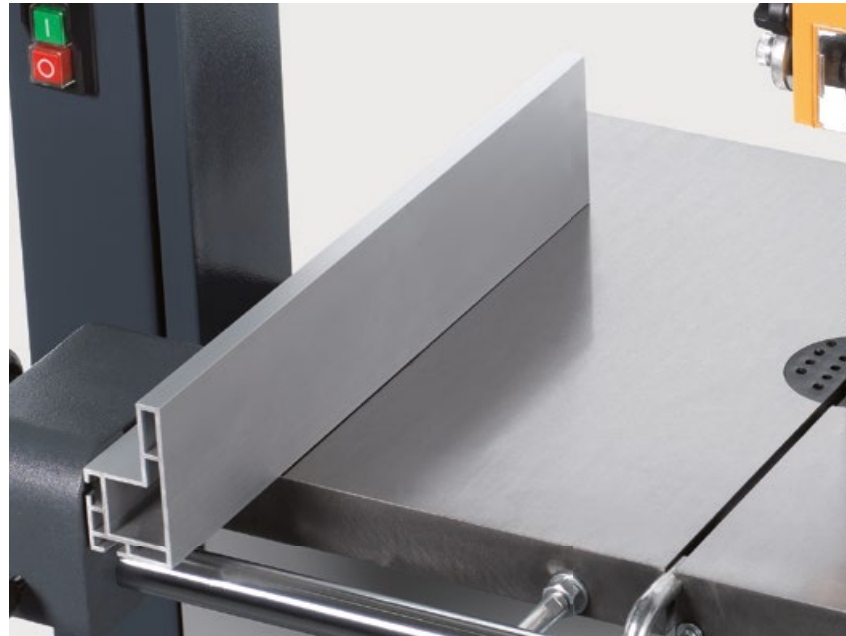

Parallel fence can be tilted away

Guided precisely along the round bar, the fence can be positioned or swung away on either the left- or right-hand side of the saw blade. The aluminium fence is mounted to the cast iron housing of the parallel fence and can be positioned along the cutting direction for improved infeeding of longer workpieces. For the processing of narrow workpieces the aluminium fence can be laid flat from the normal vertical position.



Cutting height

The height adjustment of the blade guard is adjusted by handwheel precisely over a toothed rack.



Solid, tiltable cast iron machine table

The solid table made of heavy grey cast iron can be tilted from -5 to +45°. The adjustable end stop can be tilted in to set the table 90° position.

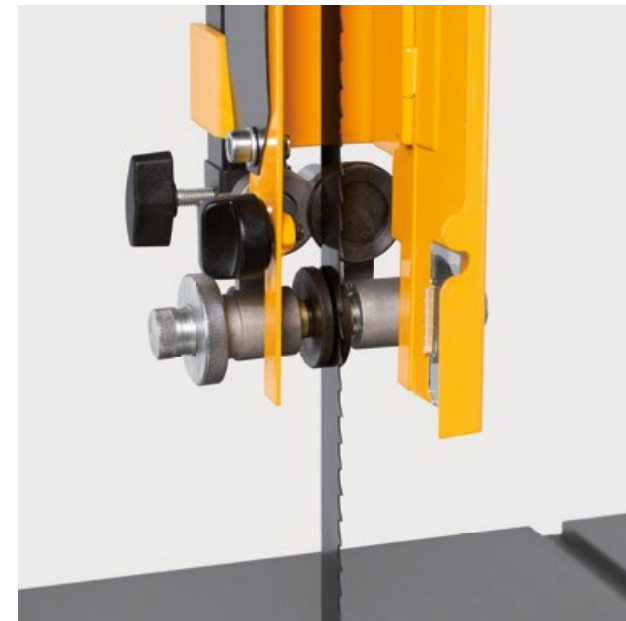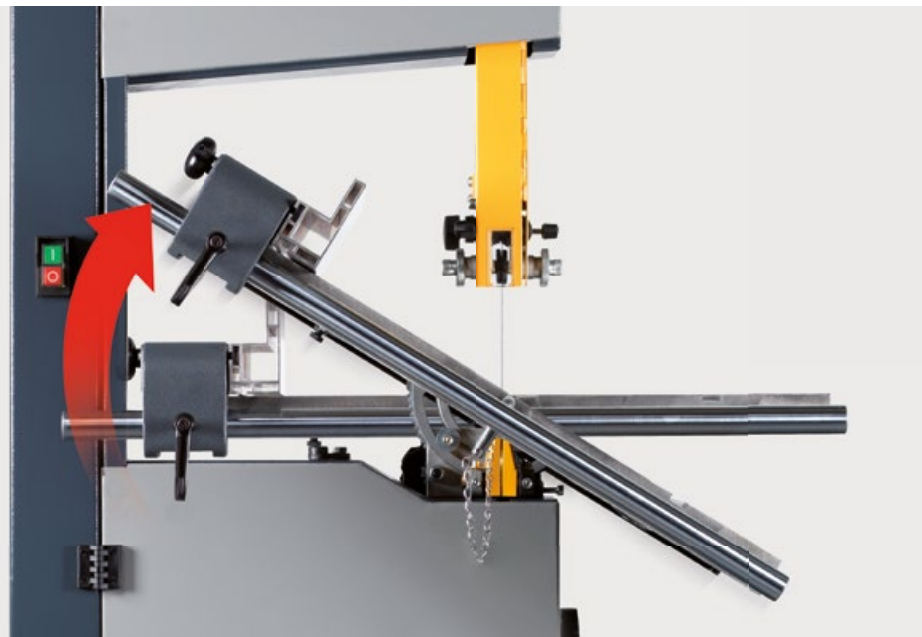

Bandsaw blade guides

The band saw is equipped with upper and lower table guides with finely adjustable side and rear rollers and lockable setting screws.



Cast aluminium bandsaw flywheels

Blade tension and tape running on the solid bandsaw wheels can be easily seen and adjusted.



Table-top or floor machine

The machine can either be used as a table-top machine or with a base (500-13-355) as a floor machine.



Rolling carriage

If the machine is equipped with a substructure, the Hammer rolling carriage can be set up.

Technical specifications

N2-35	
Blade length	2630 mm
Extraction connection diameter	100 mm
Voltage	1x 230 V
Frequency	50 Hz
Motor	1 kW
total height	1310/1700 mm
Weight	150 kg
Rip capacity	340 mm
Cutting height	235 mm
Table size	400 x 548 mm
table tilt	-5° – +45°

Product range

Combination
Machines C3 31



Combination
Machines C3 41



Saw-Spindle
Moulders B3



Planer-Thicknesser A3



Circular Saws &
Sliding Table Panel
Saws K3, K4



F3 Spindle
Moulder



CNC Portal
Milling Machines
HNC

NEW

NEW



Edge sanders



Bandsaws



Air filter dust
extractor

